



POWER RATINGS



| ВНР | 1000 | 1200 |
|--------------|------|------|
| Intermittent | 20 | 24.5 |
| Continuous | 18 | 22 |

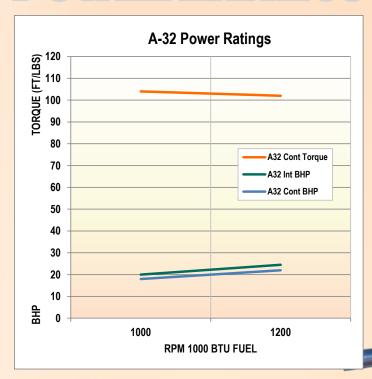

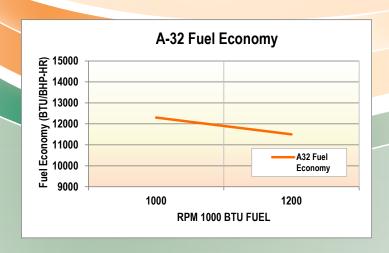



A-32 with Enclosure

A32-ML-F-JAN15







Emissions Certified Natural Gas Engine

SPECIFICATIONS

| Configuration | 4 stroke / 3 cylinder (inline) | |
|---------------------------|--|--|
| Bore x Stroke | 1.05 x 120 mm (4.13 in x 4.72 in) | |
| Engine displacement | 190 cid (3.12 L) | |
| Firing order | 1-3-2 | |
| Natural gas fuel pressure | Requirements – See operations book Emissions | |
| Power | Based on 1,000 (HHV) btu/cu ft natural gas | |
| Rotation | Counter clockwise (viewed from flywheel end forward – CCW) | |
| Engine | Naturally Aspirated | |
| Dry air filter | 600 hrs or change & clean as needed | |
| Compression ratio | 10.0: 1 | |
| Battery Charging System | 12V (63 amp.) | |
| Rated power | Max output 24.5 bhp @ 1200 rpm | |
| Power rating | Gross continuous 22.0 bhp @ 1200 rpm | |
| Governor Type | Electronic 25 mm | |
| Ignition | Belt-driven Magneto | |
| Flywheel Housing | SAE 3 | |

